

**MORE POWER – LESS SPACE™**



# unigy I®

## 12AVR 130

- **Exclusive IPF™ technology optimizes power capacity, cell consistency, and long-term reliability**
- Epoxy-sealed inserted posts deliver reliable standby power under the most demanding applications
- Space saving Absorbed Glass Mat (AGM) construction (48 volt system fits in 23" racks)
- Reinforced case resists bulging and meets safety requirements (rated 28 L.O.I.)
- Computer-aided design and manufacturing control processes and standards to ensure quality products
- All batteries meet or exceed IEEE 485 and Telcordia capacity requirements.
- Battery design and construction meet UL recognition requirements



### SPECIFICATIONS

- Nominal Voltage:** 12-Volt/125 ampere-hours  
@ 8 hr. rate to 1.75 final volts/cell
- Positive Plate:** Pure lead, low-calcium, high-tin alloy
- Negative Plate:** Lead calcium alloy
- Post Seal:** Epoxy-sealed
- Terminal:** 1/4" x 20 brass insert
- Container:** Flame-retardant, polypropylene -  
UL 94 V-0/>28% L.O.I.
- Safety Vent:** Low positive pressure, self-sealing w/ flame arrestor
- Float Voltage:** 2.25 volts per cell ± 0.01 vpc  
(13.50 volts per 6-cell unit)

**Design Life:** 10 years in float applications at 77°F/25°C

**Dimensions:** 13.46" (342 mm) L  
x 6.77" (172 mm) W  
x 11.21" (285 mm) H


**Weight:** 98 lbs. (44.5 kg)

### DISCHARGE RATE IN AMPS \*†

Volts Per Cell (V.P.C.)	1 HR.	3 HR.	5 HR.	8 HR.	10 HR.	12 HR.	20 HR.	24 HR.
1.75	89.5	36.1	23.6	15.6	12.7	10.8	6.7	5.6
1.80	86.6	35.4	23.1	15.3	12.5	10.6	6.6	5.5
1.85	77.6	33.3	22.0	14.7	12.0	10.2	6.3	5.3
1.88	71.4	31.5	20.9	14.0	11.5	9.7	6.1	5.1
1.90	66.1	30.1	20.1	13.4	11.0	9.3	5.8	4.9

\* @77°F (25°C) † Subject to change without notice.



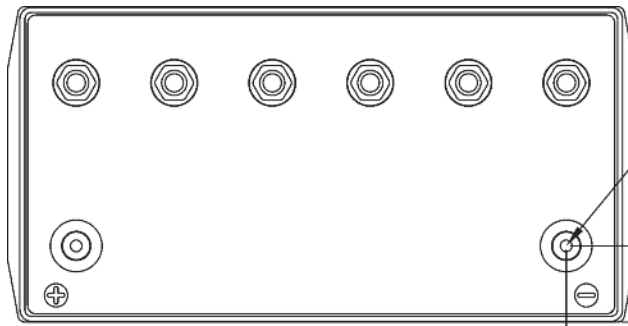


1/4 - 20 THREADED INSERT

1.635 [42]

1.473 [37]


*Dimensions shown in inches.  
Millimeters shown in parenthesis.*

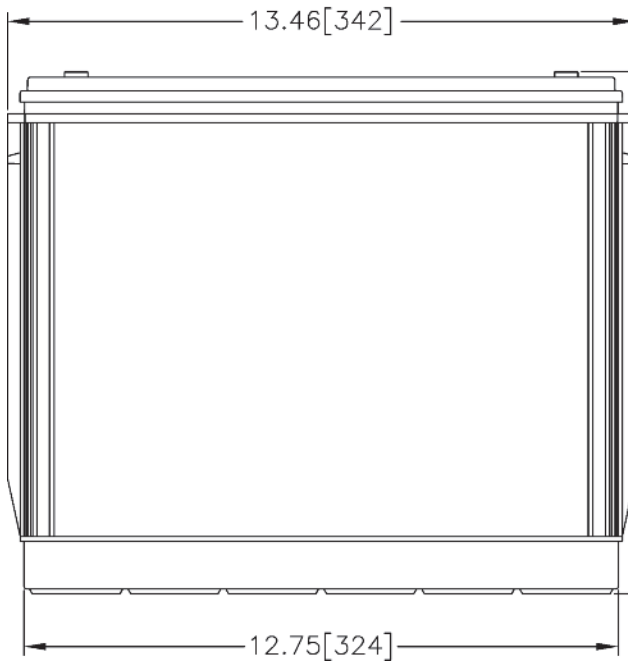

13.46[342]

11.21  
[285]

12.75[324]

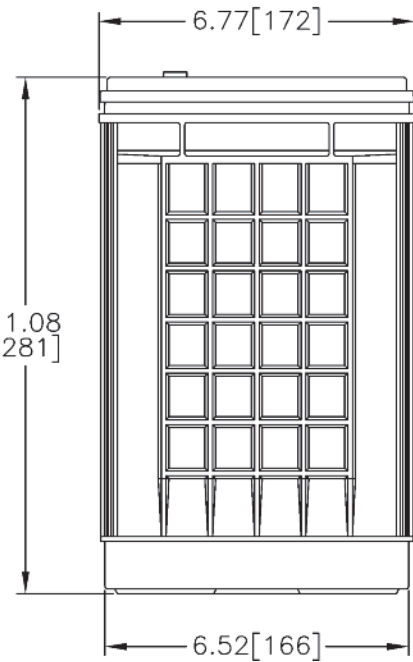

6.77[172]

11.08  
[281]

6.52[166]