

W65-13-x010

Single Band | Panel Antenna | X-Pol | 65° | 18.5 dBi | Variable Tilt

- Single band, X-Pol, variable tilt, panel antenna
- MET and RET versions, AISG v1.1 or 3GPP/AISG v2.0
- External RET unit
- Can be used with our UNICELL 3-sector antenna enclosures
- Features an adjustable mounting bracket channel for custom mounting in any situation





Ordering Options		Model Number	
When ordering, replace “x” in the model number with one of the options listed below.			
Manual Electrical Tilt		W65-13-A010	
Remote Electrical Tilt AISG v1.1		W65-13-R010	
Remote Electrical Tilt AISG v2.0 / 3GPP		W65-13-R010G	
Mounting bracket kits and other accessories are ordered separately.			
Electrical Characteristics		1710-2170 MHz	
Frequency Bands		1710-1880 MHz	1850-1990 MHz 1900-2170 MHz
Polarization		±45°	
Horizontal Beamwidth		67°	65° 63°
Vertical Beamwidth		6.8°	6.5° 6.2°
Gain		17.5 dBi	18.0 dBi 18.5 dBi
Electrical Downtilt		0-10°	
Impedance		50Ω	
VSWR		≤ 1.45:1	
Upper Sidelobe Suppression		< -16 dB	
Front-to-Back Ratio		> 30 dB	
Inter-Port Isolation		> 30 dB	
IM3 (2x20W carrier)		< -153 dBc	
Input Power		2x 200 W	
Connectors Per Band, Type, Location		2 Connectors / 7/16-DIN Female / Bottom	
Diplexed		No	
Lightning Protection		Direct Ground	
Operating Temperature		-40° to +60° C (-40° to +140° F)	
Mechanical Characteristics			
Dimensions (Length x Width x Depth): MET		1385 x 170 x 100 mm	54.5 x 6.7 x 3.9 in
Dimensions (Length x Width x Depth): RET		1555 x 170 x 100 mm	61.2 x 6.7 x 3.9 in
Weight without Mounting Brackets: MET		7 kg	15 lbs
Weight without Mounting Brackets: RET		8 kg	18 lbs
Survival Wind Speed		> 241 km/hr	> 150 mph
Wind Loads (161 km/hr or 100 mph)	Front	288 N	65 lbf
	Side	167 N	38 lbf



Quoted performance parameters are provided to offer typical or range values only and may vary as a result of normal manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to product may be made without notice.

W65-13-x010



Single Band | Panel Antenna | X-Pol | 65° | 18.5 dBi | Variable Tilt


Electrical Downtilt Control					
Manual Electrical Tilt (MET) Control		A knob located at the bottom of the antenna allows change of the tilt. The knob is accessed by removing two hex-head screws on adjustment knob cover. After adjustment is made cover must be replaced and the hex-head screws re-tightened. Manual control is only available if W65-13-A010 antenna version is ordered.			
Remote Electrical Tilt (RET) Control		The remote control of the electrical tilt is managed by an external RET module. The external remote control unit (RCU) adds an additional 170 mm (6.7 in) of length at the bottom of the antenna. When the RCU is attached to the antenna no manual electrical tilt control is available.			
RET Module		The RET module is factory installed and does not need to be ordered separately.			
		Part Number for AISG v1.1 protocol:	RETU-EB01	One unit installed in W65-13-R010	
		Part Number for 3GPP/AISG v2.0 protocol:	RETU-EG01	One unit installed in W65-13-R010G	
Important Installation Instructions		 Do not install the antenna with the connectors facing upward.			
Mounting Options		Part Number	Image	Fits Pipe Diameter	Weight
All mounting bracket kits are ordered separately unless otherwise indicated. Select from the options listed below.					
2-Point Mounting Bracket Kit		MKS02P01		40-115 mm 1.6-4.5 in	2.9 kg 6.5 lbs
2-Point Scissor Downtilt Bracket Kit		MKS02T06		40-115 mm 1.6-4.5 in	3.8 kg 8.3 lbs
2-Point Bar Downtilt Bracket Kit		MKS02T07		40-115 mm 1.6-4.5 in	3.9 kg 8.7 lbs

Quoted performance parameters are provided to offer typical or range values only and may vary as a result of normal manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to product may be made without notice.

W65-13-x010


Single Band | Panel Antenna | X-Pol | 65° | 18.5 dBi | Variable Tilt

Configuration Options	Part Number	Image	Product Description
This antenna model can be used with Amphenol's UNICELL 3-sector antenna enclosures.			
UNICELL 3-Sector Antenna Enclosure	UNX-14-xx		3-Sector, 368 mm (14.5 inch) diameter antenna enclosure
UNICELL 3-Sector Antenna Enclosure	UNX-20-xx		3-Sector, 511 mm (20 inch) diameter antenna enclosure
Antenna Bottom View			

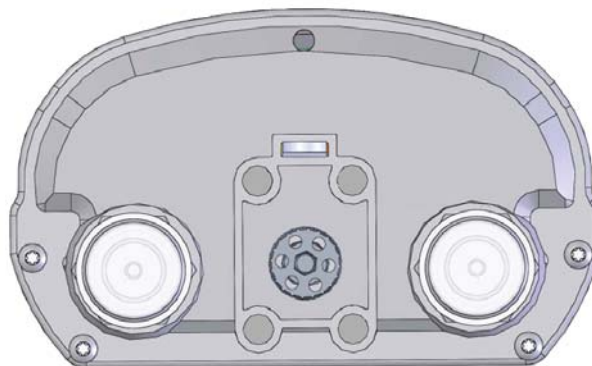

W65-13-x010

Single Band | Panel Antenna | X-Pol | 65° | 18.5 dBi | Variable Tilt

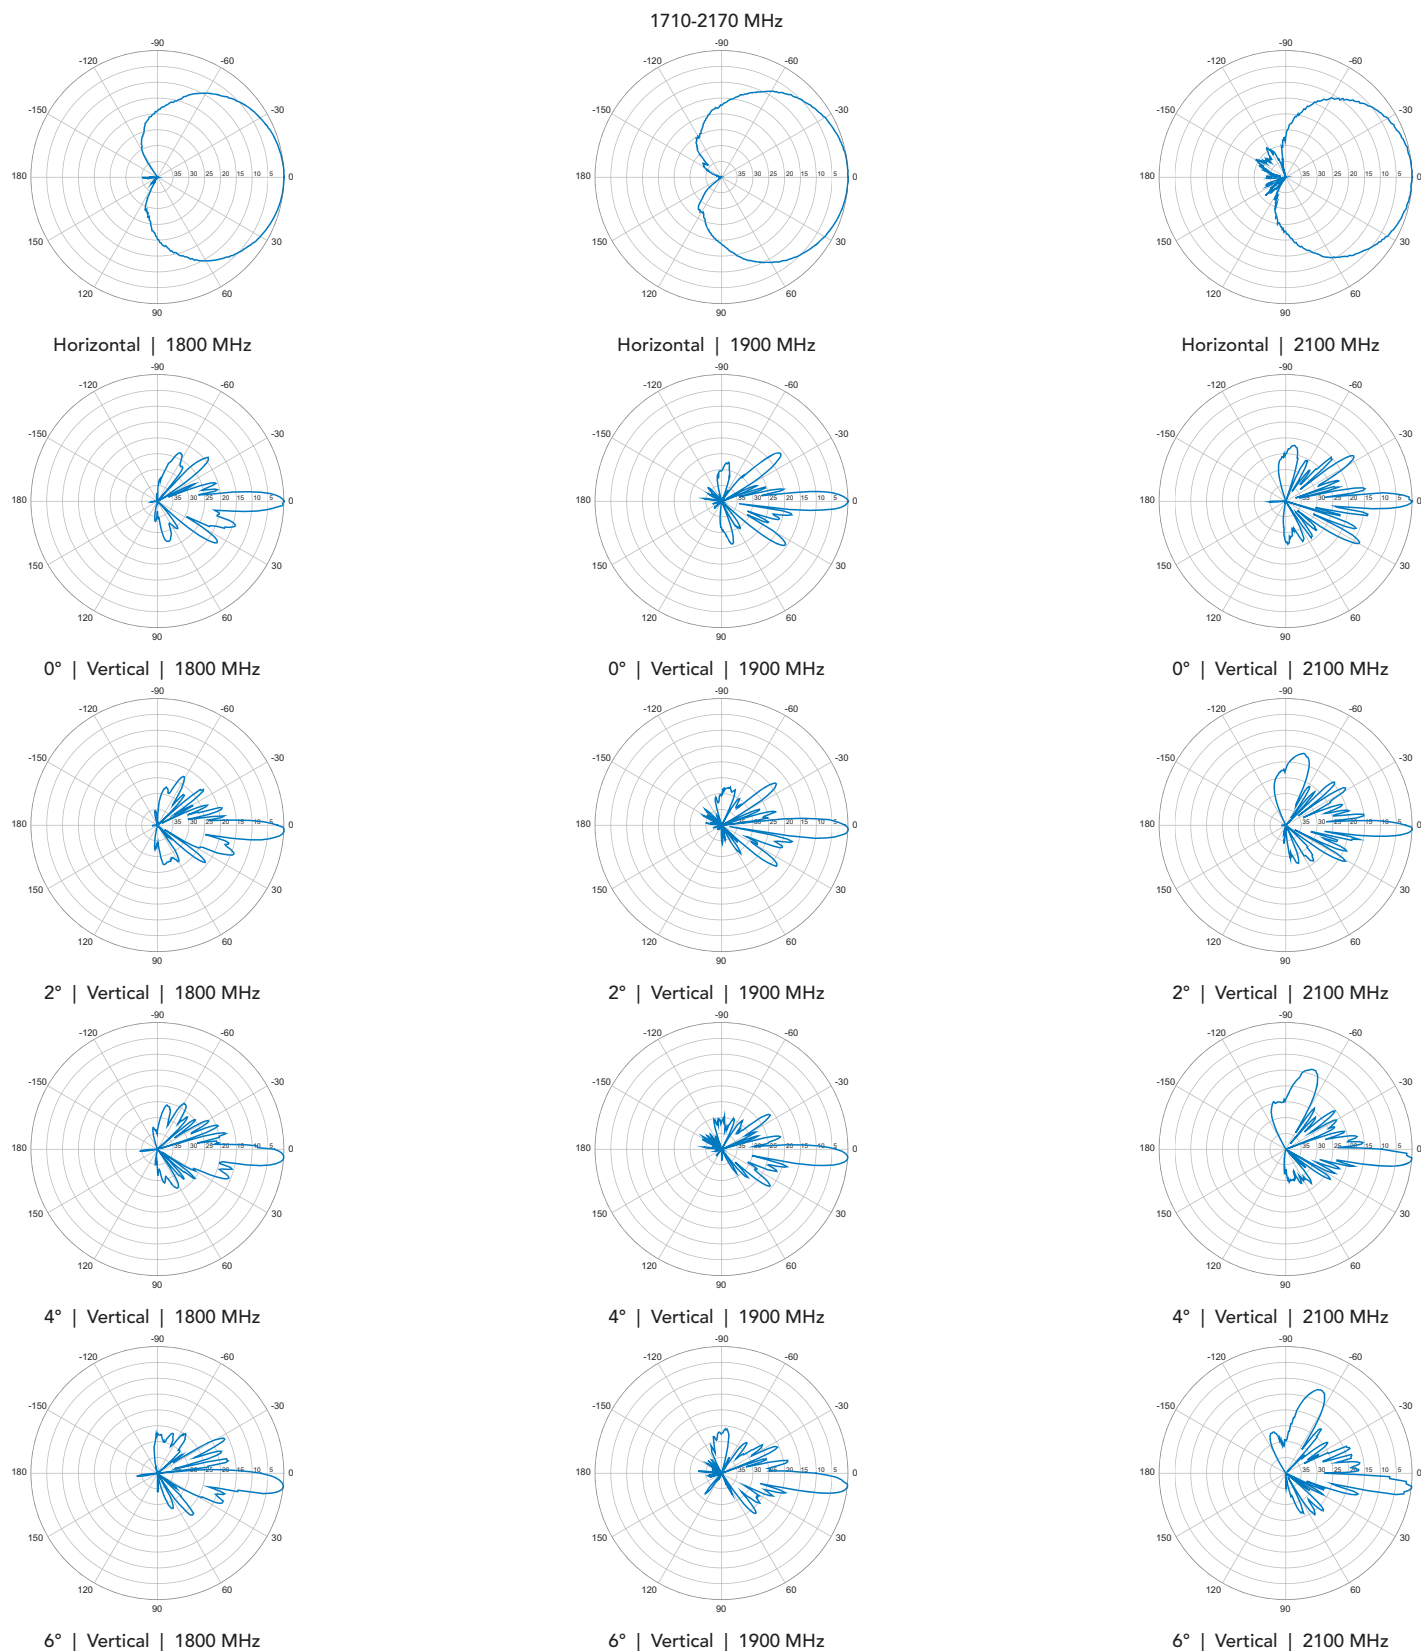

Quoted performance parameters are provided to offer typical or range values only and may vary as a result of normal manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to product may be made without notice.

W65-13-x010

Single Band | Panel Antenna | X-Pol | 65° | 18.5 dBi | Variable Tilt

