



## Commercial Booster HiBoost Pro Link 4G F17K-5S

### Overview

HiBoost Pro Link 4G(F17K-5S) is a 65dB, ultra wide band cell phone signal booster that covers up to 12,000 square feet with clear voice and high speed 2G, 3G and 4G data. It can also support large capacities of 100 cell phones users. With our Pro Link 4G, enjoy clear calls and high speed data all around your house at the lowest price guaranteed.



### FCC and IC fulfillment

- FCC Grant Code OWW for this series product. To get detail information, go to <https://apps.fcc.gov/oetcf/eas/reports/GenericSearch.cfm>  
<http://www.ic.gc.ca/app/sitt/reletel/srch/nwRdSrch.do?lang=eng>
- FCC and IC approved this equipment for use with all US & Canadian carriers
- The FCC ID for this equipment is OWWF25K-5S  
The IC ID for this equipment is 10527A-F25G5SIC



### Key Features

- All 2G, 3G and 4G standards are supported
- Supported up to 100 users
- Does not require professional installation
- Low interference to cell tower
- IC and Industrial FCC certified
- MGC function special for electric fans
- Streamline design
- Quality metal construction, strong and durable



### Booster Kit Includes


- HiBoost Pro Link 4G 65dB cell phone booster
- Outdoor Logarithmic periodic antenna with 50 feet 5D-FB cable
- Indoor panel antenna with 15 feet 5D-FB cable

Address: 6210 N. Belt Line Road, Suite 110, Irving, TX 75063 Phone: (972)870-5666 E-mail: [info@huaptecus.com](mailto:info@huaptecus.com)  
Website: [www.huaptecus.com](http://www.huaptecus.com)

## Specification

Electrical specification	
UL Frequency Range	698-716 / 776 – 787 / 824-849 / 1850-1910 / 1710-1755
DL Frequency Range	728-746 / 746 – 757 / 869-894 / 1930-1990 / 2110-2155
Supported Standards	CDMA, WCDMA, GSM, EDGE, HSPA+, EVDO, LTE and all cellular standards
Max .Gain	Uplink65dB/Downlink65dB
Max. Output Power	Uplink17dBm/Downlink17dBm
MGC ( Step Attenuation )	31dB/1dB step
Automatic Gain Control	31dB
I/O Port	N-Female
Impedance	50 ohm
Environment Conditions	IP40
Dimensions	8.6*6.5*2inch/218*165*50mm
Weight	≤5.0Lbs/2.2Kg
Power Supply	Input AC100~240V,50/60Hz,Output DC12V / 3A

## Installation Example

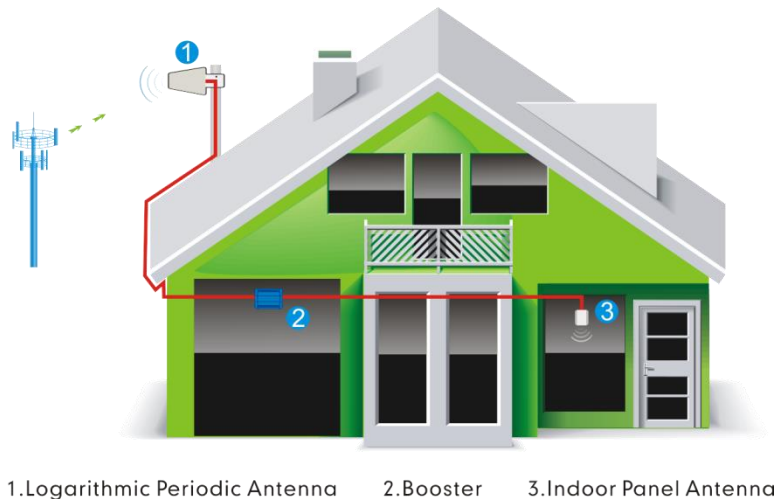

**WARNING.** This is NOT a CONSUMER device. It is designed for installation by FCC LICENSEES and QUALIFIED INSTALLERS. You MUST have an FCC LICENSE or express consent of an FCC Licensee to operate this device. Unauthorized use may result in significant forfeiture penalties, including penalties in excess of \$100,000 for each continuing violation.

Address: 6210 N. Belt Line Road, Suite 110, Irving, TX 75063 Phone: (972)870-5666 E-mail: info@huaptecus.com  
Website: www.huaptecus.com